




# Product Datasheet | Stockhorn 93105



## Dimensions

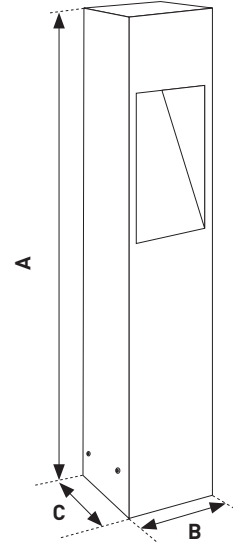

	A	B	C	Power
93105.01	500	150	100	15 W
93105.02	750	150	100	15 W
93105.03	1000	150	100	15 W
93105.04	1500	150	100	20 W
93105.05	2000	150	100	20 W
93105.06	2500	150	100	20 W

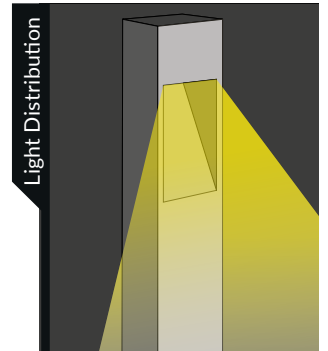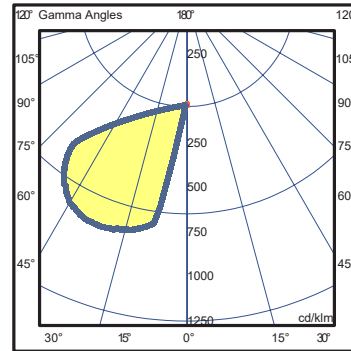


## Description

- Extruded aluminum body
- Tempered glass
- Steel flange with galvanized Chromate conversion
- Electrostatic powder coating
- Stainless steel screws (grade 304)
- Mechanical impact resistance IK06
- Protection Grade IP66
- Electrical installation Class I

## Technical Details (Felix module)

- Module luminous efficiency : 121 lm/W
- Luminaire luminous efficiency : 53,8 lm/W (4000k)
- Cct : 2700K - 3000K - 4000K - 6500K
- Color Rendering Index : >80
- Power Factor : Cos Ø > 0,9
- Led Life Time - L70 : > 72.000 hours @Ta= 45 °C
- Operating Temperature Range : -20 °C / +45 °C
- Input Voltage : 220-240(V) 50-60(Hz)
- Driver : On/Off

## Color Options

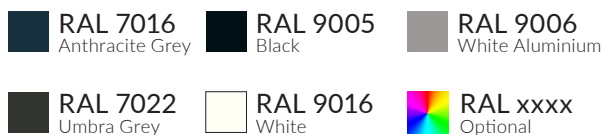

## Options

- DALI controllable
- Double powder coating